

- **Powerful:** 80cc OHV High Performance 4 Cycle Engine
- **High Output:** 2,000 Starting Watts - 1,600 Running Watts
- **Pure Power:** <3% THD of clean power output, sensitive electronics safe
- **Low Idle Technology:** Extended run time of 10 hrs at 25% load
- **Quiet Operation:** As low as 52 db. - ideal for home, camping, tailgating & RV
- **Parallel Equipped:** Complete with parallel ports for double the power output when linked together
- **Compact Design:** Lightweight for easy to transport with integrated handle

 DIGITAL INVERTER TECHNOLOGY



SUA2000iV

Integrated Top Handle



1.1-Gal Tank with 10 Hour Runtime




Quiet Tone Muffler



80cc Recoil Start Engine



Total Harmonic Distortion < 3% THD



Light Weight For Easy Mobility



Status Indicator Lights




SUA2000iV


DC Outlet:
2xUSB (1.5A, 5V)



Low Idle



5-20R 20A,
120VAC

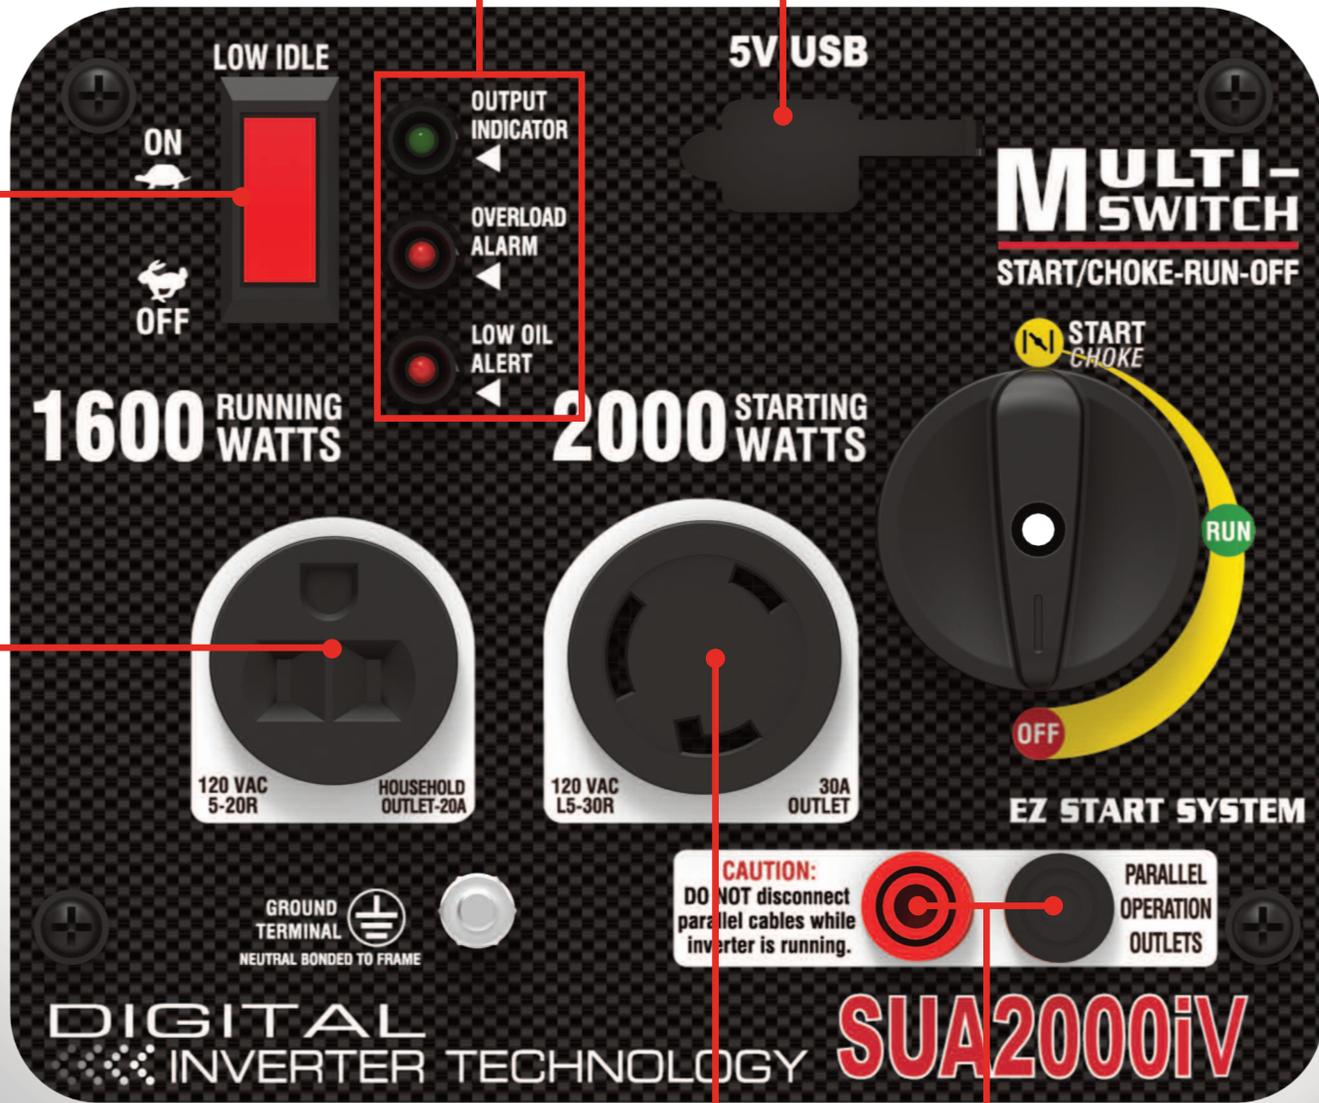

1600 RUNNING WATTS

2000 STARTING WATTS

120 VAC 5-20R HOUSEHOLD OUTLET-20A

120 VAC L5-30R 30A OUTLET

EZ START SYSTEM

CAUTION:
DO NOT disconnect
parallel cables while
inverter is running.


PARALLEL
OPERATION
OUTLETS

DIGITAL INVERTER TECHNOLOGY **SUA2000iV**

L5-30R 30A,
120VAC




Fully Integrated
Parallel Capability



SUA2000iV

Model Number	SUA2000iV
Starting/Running Watts	2000/1600W
Certifications	EPA - CARB
AC Voltage	120V
Rated Speed/Frequency	Variable/60Hz
Total Harmonic Distortion (THD)	< 3%
Grounding System	Neutral Bonded to Frame
Noise Level (dB)	52
Engine Type	Single Cylinder 80cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shtdown	Yes
Cast Iron Sleeve	Yes
Fuel Type	Gasoline
Oil Type and Capacity	10W-30 - 380ml
Low Idle	Yes
Alternator Type	Permanent Magnet - Inverter
Tank	1.1 Gal
Runtime @25% Load	10.0 Hour
Handle	Integrated (Built in)
AC Outlets	1x5-20R (20A, 120V) - 1xL5-30R (30A, 120V)
DC Outlets	2xUSB (1.5A, 5V)
Parallel Capability	Yes
Indicator LED	Output Ready - Overload - Low Oil
Included	Funnel, Tool Kit, 30A RV Adaptor, Manual, Quick Start Guide
Warranty (Residential)	3 Year
Carton LxWxH	20.9x12.4x19.3inch
Unit Weight	48.0lbs
Shipping Weight	55.1lbs
UPC	851217006640

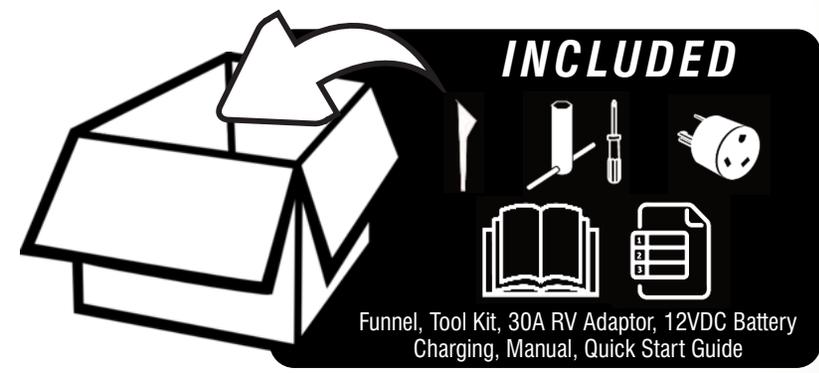

FULL PARALLEL INTEGRATION*





**DOUBLES YOUR POWER
ONCE CONNECTED**

Read manual for full instructions.

NOTE: Maximum output is obtained from the L5-30 twist lock receptacle

** Requires second SUA2000iV and parallel cables - each sold separately.*

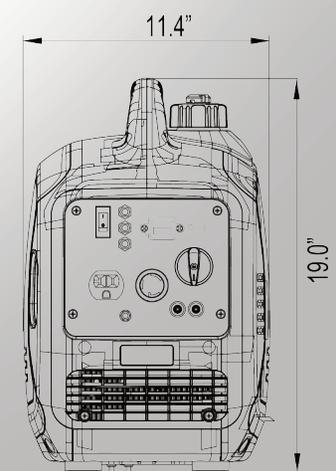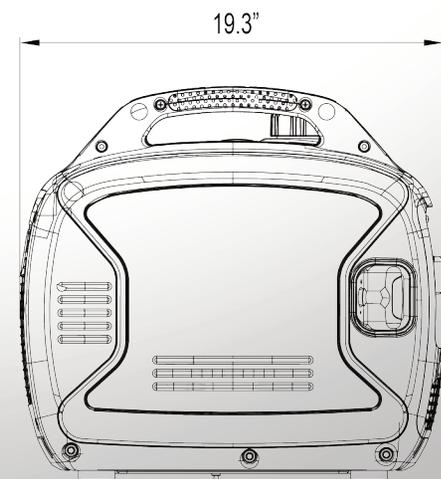

www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240

Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

LEARN MORE HERE

